



DISTRIBUTING CO., INC.
SINCE 1951

FOOD PLOT

PRODUCT GUIDE



EDNEY DISTRIBUTING CO., INC.
888.443.3639 • WWW.EDNEYCO.COM • @EDNEYCO



ABOUT US

Edney Distributing Company, Inc. is a wholesale distributor of high quality equipment focusing on the following markets: agricultural, lawn and turf maintenance, forestry, and light industrial. For a complete listing of our equipment (including hay equipment, rotary cutters, zero turn mowers, ATV and skid steer attachments, and snowblowers), reference our online catalog at www.edneyco.com/products.

Comprised of more than 1,000 reputable retail equipment dealers, our dealer network is represented in South Dakota, North Dakota, Minnesota, Wisconsin, Iowa, Michigan, Illinois, and Montana. We are proud to supply our dealers with innovative attachments and specialized equipment from manufacturers around the world. Most of the manufacturers for whom we distribute products have been business partners with us for many years, some dating back to the 1950s. However, we are continually searching for new products to better help our dealers meet their customers' changing needs.

Experienced Edney team members offer value-added services to dealers including product specifications and pricing, logistics, warehousing, warranty support, and training. Our offices are linked together by state-of-the-art phone and computer systems. No matter where a team member is based, we are able to offer friendly, speedy, and accurate dealer support. Dealers in our network have access to the dealer portal of our website for product availability, ordering, and account information.

Locations:

- Fargo, North Dakota
1230 43rd Street NW, Fargo, ND 58102
- Lakeville, Minnesota
8485 215th Street W., P.O. Box 1236,
Lakeville, MN 55044
- Huron, South Dakota
1895 Highway 14 East, Huron, SD 57350
- Portage, Wisconsin
2571 W. Wisconsin St., Portage, WI 53901



For more information, email us at sales@edneyco.com, call us at 888.443.3639, or visit www.edneyco.com. Not all lines of equipment are available in all states, please, contact your territory manager for more information.

AG SPRAY EQUIPMENT

UTV Sprayers.....	4
ATV Sprayers.....	4
Spray Boom Options	4
3PT Sprayer with Nozzle Boom.....	4

BAUMALIGHT

Brush Cutt.....	5
Fixed Tooth Mulcher	5
Fixed Tooth Mulcher For Skid Steer.....	5

DANUSER

Intimidator	6
-------------------	---

HERD

Broadcast Seeders	7
-------------------------	---

IDEAL FARM EQUIPMENT

Rotary Cutters	8
----------------------	---

KASCO MANUFACTURING

Plotter's Choice	9
Versa-Drill No-Till Drill	9
Eco-Drill No-Till Drill.....	9
KultiPacker.....	9

KODIAK

Standard Duty Lift Type Cutter	10
Medium Duty Lift Type Cutter.....	10
Heavy Duty Pull Type Cutter.....	10
Disc Harrow.....	10

METAL X

Variable Action Chain Link Drag Harrow	11
Single Tine Chain Harrow	11

MK MARTIN

Pulsar-Trail/UTV Mower	12
Pulsar-Skidsteer (Hydraulic)	12
Cultivator	12

NORDLAND EQUIPMENT

UH 50-85 HP	13
UHH Tiller 90-150 HP	13
UL Tiller 15-40 HP.....	13
FM Flail Mowers	13

RTP OUTDOORS

Genesis 3 No-till Food Plot Planter	14
Genesis 5 No-till Food Plot Planter	14
Genesis 8 No-till Food Plot Planter	15
Genesis 10 No-till Food Plot Planter	15
Ground Breaker 3 Food Plot Planter	16
Ground Breaker 6 Food Plot Planter	16
Ground Breaker 9 Food Plot Planter	16
Goliath 6 Crimper Roller	17
Goliath 8 Crimper Roller	17
Goliath 10 Crimper Roller	17

SC PRODUCTS

DH 3-Point Disc Harrows	18
-------------------------------	----

SOVEMA

Side Shift Tiller.....	19
Fixed Rotary Tiller	19
Laser-2 Tiller	19
Flail Mower.....	19

WALLENSTEIN

Gravity Feed Wood Chipper	20
Off Road Trailer with ATV Kit	20
Log Grapple	20

WORKSAVER

Flip Over Disc	21
Flip Over CultitPacker	21
3-PT. PTO Driven Seeder/Spreader	21



45 & 65 GALLON UTV SPRAYERS

Industry leading innovation and design. The line of AG SPRAY UTV sprayers is the industries only design that is specifically built for the bed of your UTV. Featuring roof mounted booms that travel over your tailgate of your machine, AG SPRAY UTV sprayers are in a class of their own. Plus, AG SPRAY UTV Sprayers are built with premium features, Shurflo pumps and highly durable polyethylene tanks.



15 & 25 GALLON ATV BOOM SPRAYERS

AG SPRAY ATV sprayers are built with premium features Shurflo pumps and highly durable polyethylene tanks. Combined with our 1 year warranty, AG SPRAY ATV sprayers will deliver dependable use when you need it most.

SPRAY BOOM OPTIONS INCLUDE:



FSBK-2

2 Nozzle boom with 80 inches of coverage



FSBK-5

5 Nozzle folding boom with 100 inches of coverage



FSBK-70

7 Nozzle folding boom with 140 inches of coverage

55 GALLON 3PT SPRAYER WITH NOZZLE BOOM

The AG SPRAY 5302483-BLU 55 Gallon 3 POINT Sprayer package comes ready to go to the field. The heavy duty 3 point carrier has built in parking stands making hooking/unhooking and storage quick and convenient. The 6-roller PTO pump has a quick coupler to easily connect to the tractor PTO shaft. Boom covers 140 inches with the 7 nozzle folding boom with spring loaded breakaway for those times when we get a little too close to objects. Controls conveniently placed making access easy from the tractor seat. Spot or fence line spraying can be done from the tractor seat or walking behind with the PRO 22 inches Spray Gun equipped with 25 Feet of hose.





CSC760 BRUSH CUTT

The CSC760 BaumaLight Brush Cutt is a heavy-duty skidsteer mount rotary brush mulcher designed to efficiently destroy dense vegetation with large skidsteers. Featuring a 1 inch thick steel rotor, the disk mulcher delivers the extra momentum to power through small trees and heavy brush. The extra bracing of a heavy-duty push bar is meant for aggressively tackling larger trees as well. It is equipped with an industry leading bent axis piston motor and bolted to a heavy duty bearing assembly. The 700 series rotary disk models with carbon tipped fixed teeth that are meant for industrial land clearing. The biggest benefit of a disk mulcher is fewer moving parts than conventional drum type forestry heads. It is an ideal brush mulcher for rental.

MP360 FIXED TOOTH MULCHER

The MP360 is a light weight fixed tooth brush mulcher for 3-point hitch tractors. With low ground speed the MP360 brush mulcher will efficiently cut heavy vegetation and light brush using high speed teeth. The concave shaped carbide tip provides aggressive brush mulching action by chipping the brush bit by bit. The ease of rotating the teeth so there is always a sharp edge to make mulching easier enhances performance. The direct drive of a brush mulcher on the PTO of a tractor is the most efficient way to run a brush mulcher.



MS348 FIXED TOOTH MULCHER FOR SKIDSTEER

Our most light weight fixed tooth brush mulcher for skidsteers. With adequate flow, the MS348 brush mulcher will efficiently cut heavy vegetation and light brush using high speed teeth. The concave shaped carbide tip provides aggressive brush mulching action by chipping the brush bit by bit. Part of the secret of their performance is the ease of rotating the teeth so there is always a sharp edge to make mulching easier.


Operating a Brush Mulcher from a skidsteer is probably the most comfortable way for vegetation management, as your work is directly in front of you and new skidsteers are very operator-comfort focused.



INTIMIDATOR

Take control of your yard! A true land clearing, obstacle removing attachment for your skid steer or tractor. The Intimidator is ideal for eliminating trees, saplings, shrubs, bushes, and other obstructions on the job site or farm. Its unmatched versatility handles the toughest stumps, posts, rocks, fencerows, and land-clearing jobs.

- Replaceable excavator bucket teeth and vertical jaw saw teeth to dig and cut roots.
- Uniquely synchronized jaws, designed for less wear and tear on the vehicle.
- Maneuver into tight locations and next to buildings or fences with ease.
- Fully-protected 3 inch diameter cylinder allows the operator to aggressively excavate objects without fear of damage to the cylinder.
- Tapered jaws allow for larger trees to be gripped near the back of the jaws, maximizing pulling force.

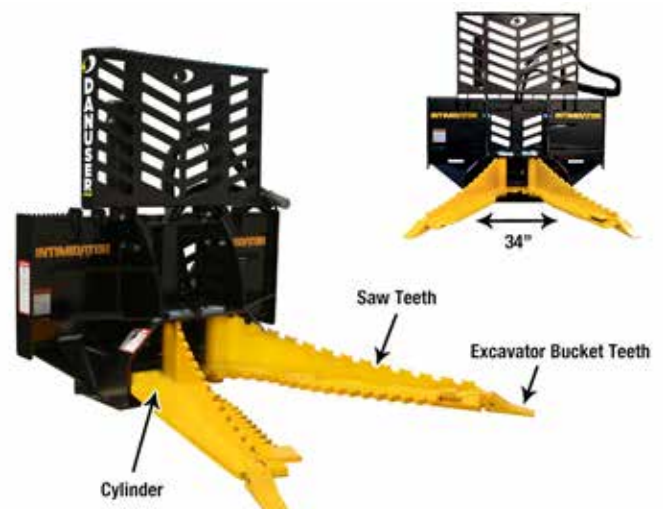



MODEL 1200C

Herd's model 1200C is a proven workhorse. With 1200 pounds and 16 bushel capacity, the model 1200C will give you both convenience and durability. Our 3-point mounted broadcasters allow you to seed anywhere your tractor can go, saving both time and money. With Herd's precision metering system, the amount of seed can be controlled from 3 pounds of seed per acre to 1000 pounds of fertilizer per acre. The model 1200C can be broadcast both seed or fertilizer with no parts to change or modifications to make.



MODEL 550-3PT

For smaller compact tractors, the Herd model 550-3PT provides a rugged broadcaster in a smaller hopper capacity. Using the same proven design as the larger Herd seeders, this low-profile seeder is easy to fill. Its maneuverable size is a good fit for estates, parks or smaller acreage.



Hydraulic remote option available for 550, 750, and 1200C.



MODEL GT-77-ATV

Whether you need to seed or fertilizer small acreage, food plots, or yards, the Herd model GT-77-ATV is a perfect fit for most ATVs, UTVs, Side-by-Side vehicles, or lawn mowers. This broadcaster will eliminate hours of time spent hand-seeding. It's precision metering system will calibrate to the smallest seeds, guaranteeing less seed waste. The GT-77-ATV's vibrating agitator system ensures a constant feed of the material being spread.



MODEL M-12

The Herd model M-12 PTO-powered broadcast seeder/spreader makes quick work of big jobs. Our rugged mountings and galvanized hopper give years of quality performance. The spinning agitator spreads both seed or fertilizer consistently. Seed rates can be adjusted down to approximately 2 pounds per acre.



MODEL 750-3PT

Herd's model 750-3PT broadcaster is ideal for category 1 tractors. With its convenient 750 pound capacity, the 750-3pt works well for smaller acreage jobs in farms, orchards or groves, schools or parks. The rugged fan assembly provides consistent seeding for most any material.

ROTARY CUTTERS



ROTARY CUTTER 5 FOOT AND 6 FOOT STANDARD DUTY

	RC205BL	RC206BL
Weight	530 lbs.	623 lbs.
Hitch	Cat 1/ quick hitch compatible	Cat 1/ quick hitch compatible
Cutting Width	60 inches	72 inches
Overall Width	64 inches	75 inches
Overall Length (Including Tailwheel)	86 inches	93 inches
Deck Height	7.5 inches	7.5 inches
Cutting Height	1.5-9 inches	1.5-9 inches
Cutting Capacity	up to 1 inch	up to 1 inch
Horsepower	20-50	25-60
Power Take-Off Speed	540	540
Gearbox	45 hp cast iron housing, precision forged steel gears	45 hp cast iron housing, precision forged steel gears
Gearbox Lubrication	EP 80-90W gear oil	EP 80-90W gear oil
Gearbox Lubrication Capacity	23 ounces	23 ounces
Deck Material Thickness	12 gauge	12 gauge
Stump Jumper	1/8 inch thick, round	1/8 inch thick, round
Blades	22.3 inch pan-type	22.3 inch pan-type
	1/2 inch x 3 inch heat treated free	1/2 inch x 3 inch heat treated free
	Swinging with suction lift	Swinging with suction lift
Blade Tip Speed	12,478 feet/minute	14,974 feet/minute
Driveline	ASAE cat. 4 shear bolt protection	ASAE cat. 4 shear bolt protection
Driveline Protection Options	Shear Bolt	Shear Bolt
Tailwheel	15 inch laminated tire	15 inch laminated tire
Safety Guards	Optional rubber front/metal rear	Optional Rubber Front/metal Rear
Blade Bolt Size	42mm socket	42mm socket
Shear Bolt	1/2 inch x 3-1/2 inch grade 2 hex bolt	1/2 inch x 3-1/2 inch grade 2 hex Bolt
Castle Nut on Gearbox	38mm socket	38mm socket



LOTTER'S CHOICE

The Plotters Choice is the only machine on the market offering two styles of seeding with one planter: Row-crop drilling for corn or soybeans, and Solid-Stand planting for any grasses or anything that requires tighter germination. All of the ground-engaging components are rolling; there are no shanks to drag trash. The Plotters Choice will positively and consistently cut through most no-till applications, including corn stalks, bean stubble, or unworked terrain.

The Plotters Choice is available as an ATV pull-type planter (4 feet wide), or as a 3-point hitch machine in widths of 4, 5, 6, or 8 feet. A new Hydraulic Pull Kit for 5 Plotters Choice is also available, for use behind 800cc+ UTV's and are the largest drills of their type.

VERSA-DRILL NO-TILL DRILL

With a smaller frame, the Versa-Drill is the perfect fit for compact tractors and ATVs. This no-till drill features Kasco's patented "Walking Beam Axle," allowing the drill to consistently follow the contour of even the most uneven terrain. The Versa-Drill offers a row of slicing blades followed by a row of opening coulters. Our seed placement device guarantees exact seed placement within the 9 inch rows.

ECO-DRILL NO-TILL DRILL

The Eco-Drill is the most rugged and durable machine in Kasco's line. A row of straight coulters slice the ground, leaving a narrow seed trench with almost no disruption of the soil. A second row of concave opener blades with a precision seed placement device follows ensuring exact seed placement within the specified rows. A full row of heavy duty cultipacker wheels run behind the openers, for premium seed-to-soil contact.

Wheel and Legume Warm Season Grass Box options available.



SOIL PREPARATION

KULTIPACKER

Kasco's durable Kultipackers use heavy duty cast iron press wheels. Available in either a 6 or 8 foot widths for your 3-point tractor, the Kultipackers make quick work of even the roughest terrain.



ROTARY CUTTERS



STANDARD DUTY LIFT TYPE CUTTER

Specifications:

- Top Link Connection: Flexible
- Type Hitch: Cat. I
- Cutting Capacity: 1 1/2 inch Material
- Deck Thickness: 11 GA Steel
- Side Bands: HD 7 inch Channel
- PTO Drive Shaft: Series 4
- Slip Clutch: Optional
- Stump Jumper: Pan Stump Jumper
- Gear Boxes: 40 HP
- Wheels: Laminated
- Hub: Greasable
- Front/Rear Chain Guard: Upon Request
- Weight for 4, 5, & 6 foot models: 390, 470, & 550 lbs
- Pull Type: Optional
- Skid Shoes: Replaceable
- Quick Hitch: Compatible



MEDIUM DUTY LIFT TYPE CUTTER

Specifications:

- Top Link Connection: Flexible
- Type Hitch: Cat. I Clevis Type
- Cutting Capacity: 2 inch Material
- Deck Thickness: 11 GA Steel
- Side Bands: HD 7 inch Channel
- PTO Drive Shaft: Series 4
- Slip Clutch: Optional
- Stump Jumper: 5/8 inches Solid Stump Jumper
- Gear Boxes: 90 HP
- Wheels: Laminated
- Hub: Greasable
- Front/Rear Chain Guard: Upon Request
- Weight for 5 & 6 foot models: 620 & 755 lbs
- Pull Type: Optional
- Skid Shoes: Replaceable
- Quick Hitch: Compatible



7 FOOT HEAVY DUTY PULL TYPE CUTTER

Specifications:

- Transport Width: 90 inches
- Type Hitch: Center Pull Self Leveling
- Cutting Height: 2 inches to 12 inches
- Cutting Capacity: 3 inch Diameter Material
- Deck Thickness: 10 GA Steel 3/16 inches or 7 GA Steel
- Tongue Jack: Fold-Up Removable
- Side Bands: 8 inch Channel
- Recommended Min. HP: 45
- Hydraulic Cylinder: 3 inches x 1.25 inches x 8 inches w/Hose
- PTO Constant: Constant Velocity w/ Slip
- Center Drive Shaft: Shock Coupler Protected (8 feet and 10 feet)
- Gear Box: 100 HP Center Box
- Gear Boxes: 2 - 90 HP Outboard
- Spindle Hubs: Ball Bearing
- Front/Rear Chain Guards: Available Upon Request
- Weight: 1650lbs
- Skid Shoes Standard: Replaceable

DISC HARROWS



56 INCH DISC HARROW 16X18 INCH BLADES

Kodiak's three-point Hitch Disc Harrow can stand up to the challenges of cultivating and prepping soil or chopping weeds.

Disc Harrow available in:

- | | |
|--------------------------------------|---------------------------|
| 90 inch Wide 24x20 inches x 7 inches | 78 inch Wide 20x18 inches |
| 90 inch Wide 20x20 inches x 9 inches | 66 inch Wide 16x18 inches |
| 84 inch Wide 20x20 inches x 7 inches | 54 inch Wide 16x16 inches |



VARIABLE ACTION CHAIN LINK DRAG HARROW

Features:

- Easy to use and handle
- Perfect results
- No lubrication or adjustments required
- Use behind ATV, lawn tractor, pickup, tractor or behind farm implements for one pass coverage

Specifications:

- 1045 carbon steel
- 76 inches wide x 96 inches long
- ½ inch x 4 inch long tines
- Heavy duty universal draw-bar
- Power required to pull: 12 HP
- Weight: 230 lbs

SINGLE TINE CHAIN HARROW

Features:

The chain harrow is ideal for horse and cattle farmers that are spreading manure to help control parasites, for preparing seed beds, covering seed beds to enhance germination, harrowing in fertilizer on hay fields to assure a faster, more vigorous re-growth, incorporating herbicides, root raking, pasture renovation, riding ring and paddock maintenance, land leveling, and landscaping.

Specifications:

- 1040 carbon steel
- 72 inches wide x 90 inches long
- ½ inch x 3-½ inch long tines
- Heavy duty universal draw-bar
- Power required to pull: 12 HP
- Weight: 177 lbs



ROTARY CUTTERS



PULSAR-TRAIL/UTV MOWER

Features:

- 44 inch Cutting Width
- 19HP Briggs & Stratton
- 12 Volt electric start
- Remote e-Stop
- 2 Rotors with 3 blades each
- Adjustable cutting height (2 inches to 7 inches) with ratchet style adjustment
- 3 position hitch for straight or offset cutting
- Flat free tires
- Swivel wheels on front, fixed wheels on rear



PULSAR - SKIDSTEER (HYDRAULIC)

Features:

- Maximum brush diameter 2 inches
- 3 blade cutting assembly
- Integrated push bar
- Relief valve for protection
- Chain curtain
- Floating linkage allows the cutter to follow ground contour

Flow Rates:

14-17 GPM
18-20 GPM
20-22 GPM
23-26 GPM
27-33 GPM
33-40 GPM

Pack. Codes:

A
B
B+
C
C+
D

Model (Hydraulic)

Shipping Weight (lbs.)

3PH Mount

Cutting Height

Cutting Path

Max Brush Diameter

Overall Width

Tip Speed (Feet/Minute)

Acres/Hour (5 MPH)

Wheels (Segmented)

Blades (Quantity)

Hydraulic Requirement*

Deck

Stump Jumper

Protection

PRCH60

770

NA

min 2 inches

60 inches

2 inches

66 inches

See Flow Chart

2.73

NA

1/2 inch x 3 inch (3)

See Flow Chart

3/16

Yes

Relief Valve

PRCH72

985

NA

min 2 inches

72 inches

2 inches

78 inches

See Flow Chart

3.27

NA

1/2 inch x 3 inch (3)

See Flow Chart

3/16

Yes

Relief Valve



Pulsar Blade Assembly



Chain Curtain Option



Mount

CULTIVATORS



CU-7 S-TINE CULTIVATOR

This line of economy cultivators fits perfectly with the hobbyist line of equipment. These Category 1, 3 Point Hitch mount cultivators use heat treated tines.

UH SERIES TILLERS 50 - 85 HP

Features:

- Gear driven side transmission
- Series 6 PTO with slip clutch
- Adjustable lower hitch brackets
- Multi speed gearbox
- Powder coated
- Adjustable side depth skids
- Three-point hitch Cat. II



UHH SERIES TILLERS 90-150 HP

Features:

- Gear driven side transmission
- Adjustable lower hitch brackets
- Multi speed gearbox
- Powder coated
- Adjustable side depth skids
- Three-point hitch Cat. II and Cat. III



UL SERIES TILLERS 15 - 40 HP

Features:

- Gear driven side transmission
- Adjustable lower hitch brackets
- Powder coated
- Adjustable side depth skids
- Three-point hitch Cat. I
quick hitch compatible



FLAIL MOWERS

FM FLAIL MOWERS

Features:

- Hydraulic side shift - standard
- PTO shaft included / 540 RPM
- Rear roller
- Powder coated
- Side depth skids
- Rotor speed 2083 RPM
- Rotor diameter 159 mm / 6.25 inches

All flail mowers are fitted with Part Number 17228 knives standard. Part Number 17295 hammers are optional, can be ordered and purchased as a spare part. Installation by dealer.

Note: Smaller HP Nordland Flail Mowers models coming soon.



FMH-175

Specifications

- Cutting Width: 69 inches
- Min-Max Engine HP: 40-60 HP
- Cat: I/II
- Number of Knives: 44
- Number of Hammers: 22
- Full Right Side Shift: 12 inches
- Weight: 955 lbs.

FMH-205

Specifications

- Cutting Width: 80 inches
- Min-Max Engine HP: 45-60 HP
- Cat: I/II
- Number of Knives: 52
- Number of Hammers: 26
- Full Right Side Shift: 12 inches
- Weight: 1060 lbs.

FMH-220

Specifications

- Cutting Width: 87 inches
- Min-Max Engine HP: 50-60 HP
- Cat: I/II
- Number of Knives: 46
- Number of Hammers: 18
- Full Right Side Shift: 12 inches
- Weight: 1113 lbs.

FOOD PLOT PLANTERS



GENESIS 3

- Working Width: 37.5 inches
- Working Depth: 0.5 - 2 inches
- Seeding Speed: Up to 7.5 mph
- Weight: 1,188 lbs
- Seeding Row Distance: 7.5 inches
- Cutting Elements: 5
- Seed-Tray Capacity: 4.9 bushels
- Hitch Type: Clevis Hitch 3-point CAT 1-2
- Maximum Capacity: 2.8 acres per hour
- Dimensions LxWxH: 46 inches x 53 inches x 51 inches ¹
100 inches x 79 inches x 56 inches ²
- Recommended Tractor Size: Min. 800cc ATV/UTV
30HP Tractor



Hydraulic lift, front cutters, and wheel kit options available for Genesis models.



GENESIS 5

- Working Width: 60 inches
- Working Depth: 0.5 - 2.5 inches
- Seeding Speed: Up to 7.5 mph
- Weight: 1,819 lbs (HD Version 2,593 lbs)
- Seeding Row Distance: 7.5 inches
- Cutting Elements: 8
- Seed-Tray Capacity: 8 bushels
- Hitch Type: 3-point CAT 1-2
- Maximum Capacity: 4.5 acres per hour
- Dimensions LxWxH: 46 inches x 74 inches x 49 inches
- Recommended Tractor Size: 40HP w/lift cap. of 2,400 lbs



GENESIS 8

- Working Width: 90 inches
- Working Depth: 0.5 - 2.5 inches
- Seeding Speed: Up to 7.5 mph
- Weight: 2,670 lbs (HD Version 3,808 lbs)
- Seeding Row Distance: 7.5 inches
- Cutting Elements: 13
- Seed-Tray Capacity: 11.5 bushels
- Hitch Type: 3-point CAT 1-2
- Maximum Capacity: 7 acres per hour
- Dimensions LxWxH: 46 inches x 104 inches x 49 inches
- Recommended Tractor Size: 55HP with lift capacity of 3,200 lbs.

GENESIS 10

- Working Width: 113 inches
- Working Depth: 0.5 - 2.5 inches
- Seeding Speed: Up to 7.5 mph
- Weight: 4,718 lbs
- Seeding Row Distance: 7.5 inches
- Cutting Elements: 16
- Seed-Tray Capacity: 12.8 bushels
- Hitch Type: 3-point CAT 1-2
- Maximum Capacity: 9 acres per hour
- Dimensions LxWxH: 46 inches x 130 inches x 49 inches
- Recommended Tractor Size: 120HP with lift capacity of 5,500 lbs





GROUNDBREAKER 3

The Ground-Breaker is a 3-in-1 food plot implement. It has a set of adjustable cutting discs on the front followed by a seed hopper that spreads any seed from corn to clover with an industry leading calibration system that has unequal accuracy and simplification. This is followed by a culti-pack roller, which smooths out the soil and gives you a good seed to soil contact. Obviously this isn't a Genesis No-Till, but if you prefer to turn the soil or if you don't want plant in rows this is your machine. It would be perfect for clover, brassicas, native grasses, cover crops and more. The Ground-Breaker 3 is a three foot model with an optional tow kit for UTV's.

- Seeding Speed: Up to 7.5 mph
- Weight: 795 lbs (1,015 lbs with Wheel Kit)
- Disc Spacing: 5.9 inches
- Number of Discs: 6
- Seed Box Capacity: 2.2 Bushels
- Hitch Type: 3-point (Clevis with Wheel Kit)
- Maximum Capacity: 2.8 acres per hour
- Working Width: 39 inches
- Commended Tractor Size: 30HP with 1,100 lbs lift capacity 800cc UTV



GROUNDBREAKER 6

- Seeding Speed: Up to 7.5 mph
- Weight: 1,205 lbs
- Disc Spacing: 5.9 inches
- Number of Discs: 12
- Seed Box Capacity: 3.8 bushels
- Hitch Type: 3-point CAT 1-2
- Maximum Capacity: 3.8 acres per hour
- Working Width: 75 inches
- Commended Tractor Size: 50HP with 1,650 lbs lift capacity



GROUNDBREAKER 9

- Seeding Speed: Up to 7.5 mph
- Weight: 2,072 lbs
- Disc Spacing: 5.9 inches
- Number of Discs: 18
- Seed Box Capacity: 5.4 bushels
- Hitch Type: 3-point CAT 1-2
- Maximum Capacity: 5.2 acres per hour
- Working Width: 110 inches
- Commended Tractor Size: 60HP with 2,518 lbs lift capacity



The Goliath Crimper Roller is the perfect tool for wildlife managers wanting to mechanically kill or terminate cover crops without the use of expensive chemicals. Using the Goliath will preserve the soil moisture, reduce ground temperatures, prevent weed growth, and the terminated cover crop adds a layer of organic, slow release fertilizer at the surface of the soil where new crops can absorb the nutrients. The Goliath Crimper Roller can be mounted on the front or the rear of the tractor, and using the weight of the machine, rolls over the crop, pressing it down, while the fins will crimp the cover crop plant in multiple places. This effectively cuts off the circulatory system of the plant, causing it to die. The Goliath also lays the cover crop down flat on the ground acting as a 'weed protection mat' and preventing sunlight from drying the soil.

GOLIATH 6

- Weight: 1,158 lbs
- Max Weight with Water: 1,608 lbs.
- Hitch Type: 3-point CAT 1-2
- Drum Width: 72 inches
- Dimensions LxHxD:
76.5 inches x 35 inches x 35.9 inches
- Vehicle Size: Min. 30 HP tractor

GOLIATH 8

- Weight: 1,445 lbs
- Max Weight with Water: 2,045 lbs.
- Hitch Type: 3-point CAT 1-2
- Drum Width: 96 inches
- Dimensions LxHxD:
100.7 inches x 35 inches x 35.9 inches
- Vehicle Size: Min. 40 HP tractor

GOLIATH 10

- Weight: 1,820 lbs
- Max Weight with Water: 2,608 lbs.
- Hitch Type: 3-point CAT 1-2
- Drum Width: 126 inches
- Dimensions LxHxD:
130.7 inches x 35 inches x 35.9 inches
- Vehicle Size: Min. 50 HP tractor



CRIMPERS

DH SERIES 3-POINT DISC HARROWS



Features:

- Cat I hitch
- Clevis Hitch provides easy hook-up
- 3 inch square frame tube
- 3/8 inch thick bearing hangers with reinforcement
- 7 1/2 inch disc blade spacing
- Self aligning sealed bearings
- 1 1/8 inch square high carbon gang bolts (Heavy-duty Series)
- 18 inch notched or smooth disc blades
- Powder coat tractor matching colors



Disc Harrow available in:

60 inch Medium-Duty Tandem
72 inch Medium-Duty Tandem
84 inch Medium-Duty Tandem
96 inch Medium-Duty Tandem

DH30-60

Specs

- Cutting Width: 60 inches
- No. of Blades: 16
- Blade Size: 18 inches
- Hitch: Cat. I
- HP Required: 30
- Weight: 735

DH30-72

Specs

- Cutting Width: 72 inches
- No. of Blades: 20
- Blade Size: 18 inches
- Hitch: Cat. I
- HP Required: 35
- Weight: 815

DH30-84

Specs

- Cutting Width: 84 inches
- No. of Blades: 24
- Blade Size: 18 inches
- Hitch: Cat. I
- HP Required: 40
- Weight: 900



TILLERS & MOWERS



RBS-2 SIDE SHIFT TILLER

Features:

The RBS-2 side-shift tiller has been designed to enhance the efficiency and toughness of the machine without compromising on the versatility and simplicity of its use.

This tiller is particularly suitable to be used in difficult, low clearance conditions such as orchards, vineyards and greenhouses. The unique 3-point hitch system allows for easy and secure offset of the machine. Single-speed gearbox. Choice of blades.



RTX-2 FIXED ROTARY TILLER

Features:

Top of the rotary tiller series, the RTX-2 tiller is built to be used under very tough conditions. With double frame, reinforced rear shield and double flange. 140 ASA-chain driven. The RTX-2 series is only available with a 4 speed gearbox. 540 or 1000 rpm.

6 blades per flange. Angular (L) or speed (C) blades available.



LASER-2 TILLER

Features:

Specially designed for tractors up to 35 HP, the LASER-2 tillers offer versatility, simplicity, and economy. Ideal for small landscape and yard maintenance contractors. The Laser's completely adjustable offset and compact design make it the perfect machine for confined areas such as orchards and vineyards.

Adjustable depth control skids. Chain drive. Side-shift on hexagonal shaft. 4 blades per flange. Single speed gearbox.



FLAIL MOWER

Features:

FM-2 flail mowers are designed for grass cutting and also for branches and stocks. Machines are supplied with rear shield, which can be open or closed, according to needs.

Cutting height regulation by rear roller or skids. Choice of knives, according to different kinds of work. Side transmission by special belts. Safety guards.

CHIPPERS & TRAILERS

WALLENSTEIN***BX36S GRAVITY FEED WOOD CHIPPER***

Compatible The self feeding chipper automatically pulls in limbs and branches up to 3.5 inches in diameter. Chipping action is powered directly from your tractor's PTO.

Specs:

Chipping Capacity: 3.5 inches
 Chipper Type: Disc
 Feed System: Gravity
 Engine HP Range: 12 - 30
 Chipper Hopper Opening: 13 inches x 20 inches
 Chipper Rotor Opening: 3.5 inches x 9 inches
 Number Of Chipper Knives: 4
 Rotor Diameter: 25 inches
 Rotor Weight : 96 lbs
 Discharge Chute Height: 60 inches
 Discharge Chute Rotation: 360°
 Drive System: PTO Direct Drive
 Rated RPM: 540 - 1000
 PTO Height: 13 inches - 19 inches
 Total Weight: 395 lbs
 Dimensions Open (LxWxH): 55 inches x 45 inches x 60 inches Mounting System: Cat I, iMatch™ & Quick Hitch

***LT30A OFF ROAD TRAILER WITH ATV KIT*****Specs:**

Load Capacity: 5000 lbs
 Trailer Bed Length: 96 inches
 Tongue Weight: 250 lbs-515lbs
 Highway Towable: No
 Brakes: Surge
 Sliding Axle: Hydraulic Sliding Axle

LOG GRAPPLES

LXG420R LOG GRAPPLE

When you need to load, transport and stack logs smoothly and quickly at the sawmill, look no further than Wallenstein's Skidsteer log grapples. Mounted directly to your skidsteer, these heavy-duty grapples give you total control from inside the cab to pick up and move logs with incredible agility.





ATV ATTACHMENTS



FOD-16 **FLIP OVER DISC**

Ideal for tilling wildlife food plots and larger gardens. Patented design allows for easy "flip-over" from transport to cultivation mode. Features eight (8) 16 inch notched blades designed for efficient trash cutting and optimum soil penetration.



FOC-48 **FLIP OVER CULTIPACKER**

Perfect for final compaction after seeding your food plot. Reduces air pockets and increases seed germination. Helps prevent erosion. Unique design allows for easy "flip-over" from transport to operation mode. Can also be used for breaking the crust of rain-hardened soil, to allow emerging seedlings to break through and grow.

WORKSAVER 3-PT. PTO DRIVEN SEEDER/SPREADER

WorkSaver seeder/spreader models CS-694, CS-1094, and CSP-1094 are built for the farmer who requires a quality, economical broadcast seeder/spreader. They easily handle all grass seed, wheat, oats, and fertilizers producing a uniform spread pattern. These models offer three spread patterns: left side only, right side only, or full 180° spread by simply moving a lever. Cone shaped hopper provides easy material flow.


The CS-694 is available in 6 bushel capacity with a steel hopper. The CS-1094 and CSP-1094 are available in 10 bushel capacity, CS-1094 comes with a steel hopper while model CSP-1094 has a poly hopper. An optional wheel agitator is available for lime and fertilizers to improve flow.

- Choice of large hopper capacity
- Choice of steel or poly hopper (CSP-1094 Only)
- Easy shift lever for directional spread
- Adjustable spinner fans for aggressive or passive spread
- Strong tubular steel main frame
- Heavy duty gearbox
- Fits large Cat. I hitches
- Optional rotating rod and wheel agitator



THE NEW EDNEYCO.COM WITH E-COMMERCE FUNCTIONS FOR DEALERS:

- Online ordering
- Order tracking
- Access purchase history
- View invoices and statements
- Create order templates
- SuperUser feature as admin
 - Create users for your dealership location
 - Assign permissions
 - Assign levels of access to your team

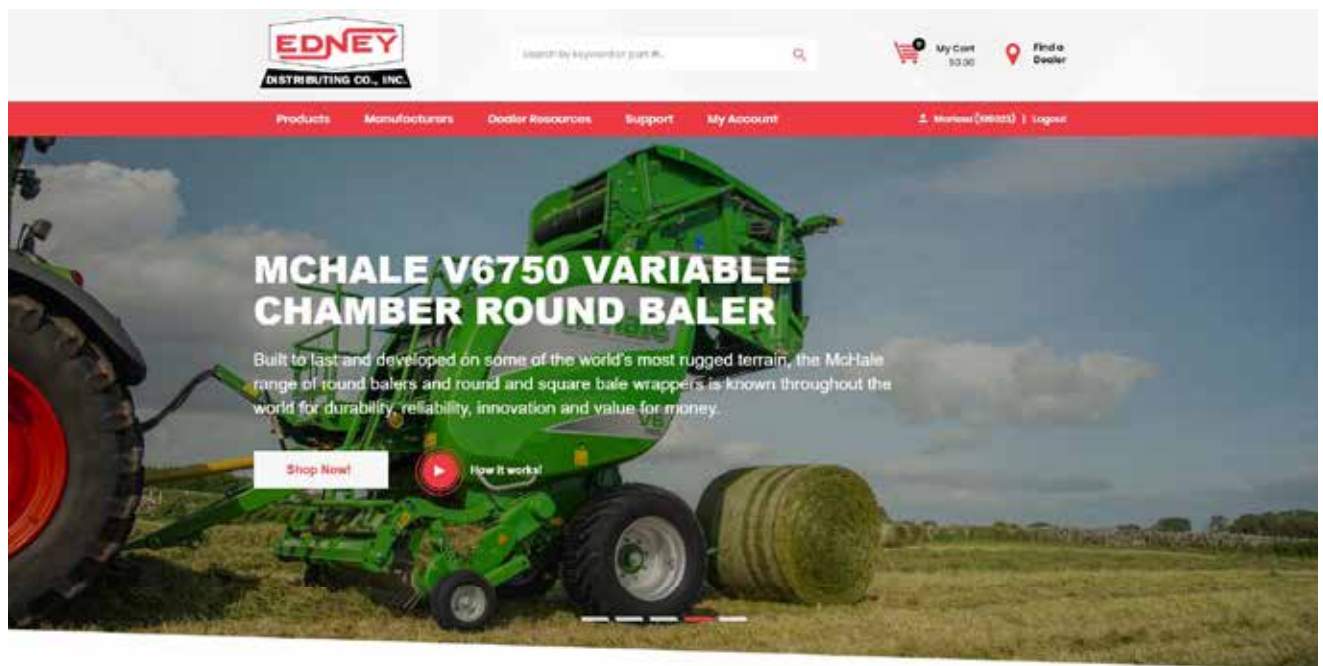

SHIPPING TERMS OF SALE

Unless otherwise specified, prices are published as "Free on Board (F.O.B.) Factory." This means that the buyer takes title at the time the items are acknowledged by the freight company, pays transportation costs from factory to dealership, and files claims (if any). Applicable back freight will be an additional cost, you can find the back freight rates on our website, in the Dealer Resources section. Prices specified "F.O.B. Warehouse" are not subject to back freight charges. Please note that prices and discounts are subject to change with or without notice.

MINIMUM ORDERS

Minimum billing for an order is \$5.00 (five dollars). Orders that total less than \$10.00 (ten dollars) are not eligible for any type of dealer discounts.

TERMS

Generally, our terms are classified as straight open account. Organizations with satisfactory credit ratings are considered eligible to establish this type of arrangement with our company as determined through our application process. Dealers who participate in Edney's seasonal early-order programs will be eligible for extended dating. It is expected that these items will be sold "in-trust." In other words, that the dealer will pay Edney out of their sale proceeds when the item is retailed or by the end of the agreed upon term, whichever is sooner. Due to slow or no pay, accounts that are not in good standing may be changed to C.O.D. status. Dealers with C.O.D. account status carrying a "zero" account balance will be eligible to receive cash discounts. However, dealers with C.O.D. accounts carrying a "past due" account balance will not be eligible for cash discounts.

WILL CALL ORDERS

When ordering, customers may opt to pick up their items at one of our warehouses instead of arranging for shipment. If the items are in-stock, arrangements can be made at the time of sale. If the items are back ordered, you will be notified when your equipment is available and can arrange for a pick-up or opt to ship the items at that time.

Edney Distributing Company attempts to maintain adequate stocks to cover all of our pending will call orders; however it is impossible to fill such orders without a specific pick-up date.

BACK ORDERS

When back ordered merchandise is received by Edney Distributing, an Edney dealer support person will contact you. Back orders will be filled as soon as the merchandise is received by Edney Distributing, unless we receive other instruction or an order cancellation.

The full trade policy document is available upon request. Please, contact sales@edneyco.com or 888-443-3639 to have it emailed, faxed, or mailed by our dealer support team.



DISTRIBUTING CO., INC.

888.443.3639 • WWW.EDNEYCO.COM • @EDNEYCO

1895 Highway 14 East
Huron, SD 57350

8485 215th Street West
Lakeville, MN 55044

1230 43rd Street NW
Fargo, ND 58102

2571 West Wisconsin
Portage, WI 53901



EquipmentDealers
ASSOCIATION



PRAIRIE
FAMILY BUSINESS
ASSOCIATION

