

REAR BLADES



BUILT TO LAST

SFI

SUPERIOR IMPLEMENTS

1920 A Street Ada, OK 74820

(580) 332-9300 (800) 843-8354

WWW.SFIIMPLEMENTS.COM

SMALL REAR BLADES

THE MOST VERSATILE REAR BLADES ON THE MARKET TODAY WITH ANGLE TILT FEATURES NORMALLY FOUND ON LARGE EXPENSIVE REAR BLADES. EXTREMELY VERSATILE FOR DIRT WORK, SNOW REMOVAL AND CLEAN UP. SIMPLE, YET VERY WELL BUILT.

FEATURES:

INCLUDES SLIDE UP AND DOWN PARKING STAND

ALL WELDED UNITS - NO ASSEMBLY REQUIRED

WE WILL POWDER COAT TO MATCH MOST COMMON TRACTOR COLORS AT NO ADDITIONAL CHARGE!



SPECIFICATIONS	RB5	RB6	RB7
WORKING/ OVERALL WIDTH	60"	72"	84"
WEIGHT	260lbs	285lbs	300lbs
CUTTING EDGE	1, 1/2" X 6" HEAT TREATED, BOLT-ON REPLACEABLE		
HITCH	CAT 1, 3-POINT, ASAE QUICK HITCH COMPATIBLE		
HP RATING	UP TO 30HP, 2 OR 4WD		
MAIN BEAM	4" X 4" STEEL TUBING		
MOLDBOARD	1/4" X 13" ROLLED FORMED		
KING PIN	2" SOLID ROUND		
BLADE ANGLE	MANUAL, UP TO 45° RIGHT OR LEFT		
BLADE TILT	MANUAL, 14° - 25° UP OR DOWN		

STANDARD LANDSCAPE RAKE

SUPERIOR LANDSCAPE RAKES ARE EXCELLENT TOOLS FOR SPREADING TOP SOIL, DISTRIBUTING GRAVEL AND REMOVING STONES AND DEBRIS.



FEATURES:

FIVE FORWARD AND FIVE REVERSE ANGLE POSITIONS ON ALL MODELS

OPTIONAL DUAL GAUGE WHEEL KITS ARE AVAILABLE FOR ALL MODELS

FORMED TINE WITH LOCKABLE TINE SPACING
1" SPACING BETWEEN TINES

MAXIMUM ANGLE SETTING OF 45°


ALL WELDED UNITS - NO ASSEMBLY REQUIRED

WE WILL POWDER COAT TO MATCH MOST
COMMON TRACTOR COLORS AT NO ADDITIONAL
CHARGE!

SPECIFICATIONS	LR20-60	LR20-72	LR20-84	LR20-96
WORKING WIDTH	60"	72"	84"	95"
WEIGHT	195lbs	240lbs	270lbs	300lbs
NUMBER OF TINES	30	36	42	48
HITCH	CAT I			
TINE HEIGHT	15"			
TINES	5/16" X 1" HIGH CARBON STEEL			
HP RATING	30-60HP, 2 OR 4WD			
BOOM/CROSSBEAM	4" X 4" X 1/4" STEEL TUBING			
MAST	3/16" PLATE			
SWIVEL PLATE	1/2" PLATE			

LEIGHTWEIGHT LANDSCAPE RAKE

THE **SUPERIOR** LANDSCAPE RAKES ARE EXCELLENT TOOLS FOR SPREADING TOP SOIL, DISTRIBUTING GRAVEL AND REMOVING STICKS AND DEBRIS.

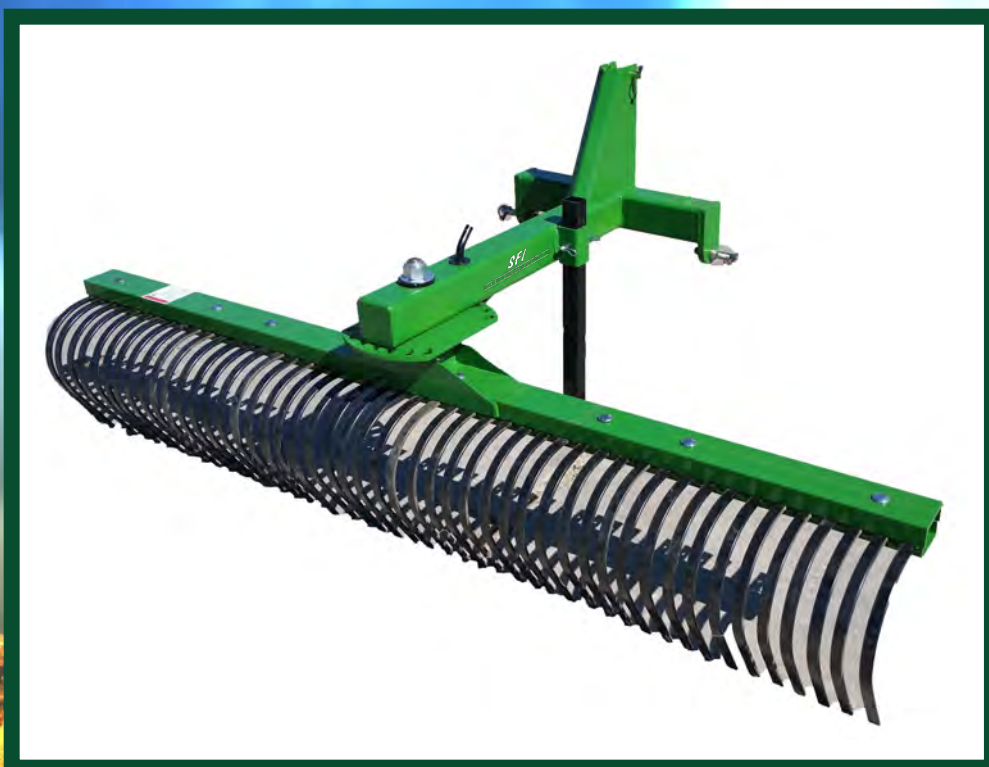

FEATURES:

ADJUSTABLE TO USE IN THE STRAIGHT POSITION OR ANGLED TO THE RIGHT OR LEFT FOR WINDROWING MATERIAL

AVAILABLE WITH OPTIONAL GAUGE WHEEL - A GREAT AID FOR STABILTY AND LEVELING IN GENERAL GRADING WORK

POSITION THE RAKES IN REVERSE FOR PUSHING MATERIAL INTO SLOPED POSITION

FORWARD AND REVERSE SETTINGS AT 18° OR 36°

HIGH CARBON STEEL TEETH ON 1" SETTINGS

ALL WELDED UNITS - NO ASSEMBLY REQUIRED

WE WILL POWDER COAT TO MATCH MOST COMMON TRACTOR COLORS AT NO ADDITIONAL CHARGE!

SPECIFICATIONS	LR10-48	LR10-60
WORKING WIDTH	48"	60"
WEIGHT	168lbs	178lbs
HITCH	CAT I	
TINE HEIGHT	12"	
TINES	HIGH CARBON STEEL	
HP RATING	30-40HP, 2 OR 4WD	
BOOM/CROSSBEAM	3" X 3" X 3/16" STEEL TUBING	
MAST	3/16" PLATE	
SWIVEL PLATE	3/8" PLATE	

MEDIUM REAR BLADE

FEATURES:

INCLUDES SLIDE UP & DOWN
PARKING STAND

ALL WELDED UNITS - NO
ASSEMBLY REQUIRED

WE WILL POWDER COAT TO
MATCH MOST COMMON
TRACTOR COLORS AT NO
ADDITIONAL CHARGE!



SPECIFICATIONS	RB60	RB70
WORKING/OVERALL WIDTH	72"	84"
WEIGHT	360lbs	380lbs
CUTTING EDGE	1, 1/2" X 6" HEAT TREATED, BOLT-ON REPLACEABLE	
HITCH	CAT 1, 3-POINT, ASAE QUICK HITCH COMPATIBLE	
HP RATING	UP TO 50HP, 2 OR 4WD	
MAIN BEAM	4" X 4" STEEL TUBING	
MOLDBOARD	1/4" X 16" ROLLED FORMED	
KING PIN	2" SOLID ROUND	
BLADE ANGLE	MANUAL, UP TO 45° RIGHT OR LEFT	
BLADE TILT	MANUAL, 14° - 25° UP OR DOWN	
BLADE OFFSET	MANUAL, 35° RIGHT OR LEFT	

CATEGORY II REAR BLADE

THESE **SUPERIOR** BLADES ARE EASILY SET FOR SWING OFFSET, TILT AND ANGLE, CHANGE DITCHING OR GRADING ANGLES BY JUST PULLING A PIN. THE HEAVY DUTY DESIGN IS RUGGED, RELIABLE ASSURING YEARS OF TROUBLE-FREE USE.

FEATURES:

MANUAL OR HYDRAULIC ADJUSTMENT OPTION

-HYDRAULIC TILT OPTIONS REQUIRES A 3" X 8" CYLINDER (NOT INCLUDED)

-HYDRAULIC ANGLE OPTION REQUIRES A 3" X 14" CYLINDER (NOT INCLUDED)

OPTIONAL GAUGE WHEEL AVAILABLE

-2" X 6" CYLINDER AND HOSES

-SINGLE OR DUAL-WHEEL (6" X 9" LAMINATED TIRE)

DESIGNED FOR MID-SIZE TRACTORS USED FOR RUGGED PROJECTS

MOLDBOARD IS ROLLED FORMED WITH REINFORCED BOX

HEAVY 3-POINT DESIGN FOR STRENGTH

INCLUDES FOLD AWAY PARKING STAND

ALL WELDED UNITS - NO ASSEMBLY REQUIRED

WE WILL POWDER COAT TO MATCH MOST COMMON TRACTOR COLORS AT NO ADDITIONAL CHARGE!



SPECIFICATIONS	MANUAL			HYDRAULIC		
	RB75	RB85	RB95	RB75H	RB85H	RB95H
WORKING/OVERALL WIDTH	84"	96"	108"	84"	96"	108"
WEIGHT	770lbs	800lbs	830lbs	790lbs	820lbs	850lbs
CUTTING EDGE	1, 1/2" X 6" HEAT TREATED, BOLT-ON REPLACEABLE					
HITCH	CAT II, 3-POINT ASAE QUICK HITCH COMPATIBLE					
HP RATING	UP TO 95HP, 2 OR 4WD					
MAIN BEAM	5" X 5" STEEL TUBING					
MOLDBOARD	1/4" X 19" BOXED FORMED					
KING PIN & PEDESTAL PIN	3" SOLID ROUND					
OFFSET & SWING PIVOT PLATE	5/8" THICK					
BLADE ANGLE	MANUAL OR HYDRAULIC, UP TO 50° RIGHT OR LEFT					
BLADE TILT	MANUAL OR HYDRAULIC, 20° UP OR DOWN					
BLADE OFFSET	MANUAL, 40° RIGHT OR LEFT					

LARGE REAR BLADE

THESE **SUPERIOR** ARE THE ANSWER TO YOUR HIGH HORSEPOWER EARTH-MOVING REQUIREMENTS. THESE BLADES ARE AVAILABLE IN COMPLETE HYDRAULIC, COMPLETE MANUAL OR ANY COMBINATION OF FUNCTIONS. THE HEAVY DUTY FRAME IS RUGGED AND RELIABLE. THESE BLADES ARE BUILT TO LAST.



FEATURES:

MANUAL , HYDRAULIC OR ANY COMBINATION OF ADJUSTMENT OPTIONS

- HYDRAULIC TILT OPTIONS REQUIRES A 3" X 8" CYLINDER (NOT INCLUDED)
- HYDRAULIC ANGLE OPTION REQUIRES A 3" X 14" CYLINDER (NOT INCLUDED)
- HYDRAULIC OFFSET OPTION REQUIRES A 3" X 14" CYLINDER (NOT INCLUDED)

OPTIONAL GAUGE WHEEL AVAILABLE

- 2" X 6" CYLINDER AND HOSES
- SINGLE OR DUAL-WHEEL
(6"X 9" LAMINATED TIRE)

MOLDBOARD IS ROLLED FORMED WITH REINFORCED BOX

HEAVY 3-POINT DESIGN FOR STRENGTH

INCLUDES FOLD AWAY PARKING STAND

ALL WELDED UNITS - NO ASSEMBLY REQUIRED

WE WILL POWDER COAT TO MATCH MOST COMMON TRACTOR COLORS AT NO ADDITIONAL CHARGE!

SPECIFICATIONS	RB800	RB900	RB1000
WORKING/OVERALL WIDTH	96"	108"	120"
WEIGHT	1105lbs	1155lbs	1215lbs
CUTTING EDGE	1, 1/2" X 6" HEAT TREATED, BOLT-ON REPLACEABLE		
HITCH	CAT II, 3-POINT ASAE QUICK HITCH COMPATIBLE		
HP RATING	UP TO 125HP, 2 OR 4WD		
MAIN BEAM	6" X 8" STEEL TUBING		
MOLDBOARD	1/4" X 21" BOXED FRAMED		
KING PIN	4" SOLID ROUND		
BLADE ANGLE	MANUAL OR HYDRAULIC, UP TO 30° RIGHT OR LEFT		
BLADE TILT	MANUAL OR HYDRAULIC, 14° UP OR DOWN		
BLADE OFFSET	MANUAL OR HYDRAULIC, 30° RIGHT OR LEFT		

SUPERIOR IMPLEMENTS OFFERS DURABLE, HARD-WORKING EQUIPMENT YOU CAN COUNT ON TO PERFORM AND DELIVER YEAR AFTER YEAR. DESIGNED AND ENGINEERED WITH INDUSTRY LEADING FEATURES, SUPERIOR IMPLEMENTS WILL BE YOUR BEST INVESTMENT NO MATTER HOW TOUGH THE JOB.

WHETHER YOUR GOAL IS CREATING LANDSCAPE, GOLF-COURSE MAINTENANCE, RESIDENTIAL, FARMING OR COMMERCIAL USE, SUPERIOR IMPLEMENTS OFFERS A VARIETY OF IMPLEMENTS THAT FIT YOUR INDIVIDUAL NEEDS AND BUDGET.

CHOOSE THE SUPERIOR IMPLEMENT PRODUCT THAT IS RIGHT FOR YOU AND YOU WILL BE GUARANTEED THE PEACE OF MIND KNOWING YOUR SUPERIOR IMPLEMENT WILL BE THERE WHEN YOU NEED IT.



PROUDLY MADE IN THE USA

SFI

A Tri-Point Company



WE WILL POWDER COAT TO MATCH MOST COMMON TRACTOR COLORS AT NO ADDITIONAL CHARGE.



YELLOW RED ORANGE GRAY BLUE GREEN BLACK