

GRYB

AG & LIGHT INDUSTRIAL

SNOWBLOWER

3-PT COMMERCIAL



GRYB's commercial snowblowers are engineered for performance and durability. Featuring a reinforced housing, newly redesigned chute for improved snow discharge, and upgraded 3-point hitch arms for better stability and compatibility, these machines are ready to take on serious snow removal jobs.


**BUILT TO
HANDLE THE
TOUGHEST
WINTER
CONDITIONS**



Reinforced housing



New re-designed chute

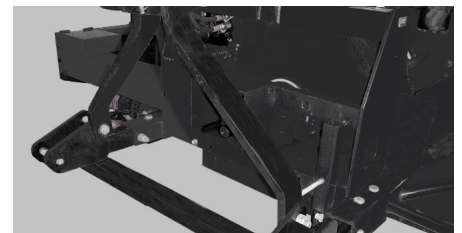

New 3-point hitch arms

SNOWBLOWER

3-PT COMMERCIAL

		SA74-LA	SA80-LA	SA88B SA88TRCB	SA92B SA92TRCB	SA98B SA98TRCB	SA102TRCB	SA80i INVERTED	SA92iB INVERTED
Recommended Horsepower	HP AT PTO	35 to 80	35 to 80	55 to 85	75 to 125	100 to 150	100 to 150	35 to 80	60 to 100
Cutting Width	IN (CM)	74 (188)	80 (203)	88 (224)	92 (234)	98 (249)	102 (259)	80.5 (204)	92.5 (235)
Cutting Height	IN (CM)	31 (79)	31 (79)	41 (104)	41 (106)	41 (106)	41 (106)	31 (79)	35 (89)
Fan Diameter	IN (CM)	26 (66)	26 (66)	28 (72)	30 (76)	30 (76)	30 (76)	26 (66)	30 (76)
Fan Width	IN (CM)	10.5 (27)	10.5 (27)	12 (30)	12 (30)	12 (30)	12 (30)	11 (28)	12 (30)
Shaft Diameter	IN (CM)	1.5625 (4)	1.5625 (4)	1.5625 (4)	2 (5)	2 (5)	2 (5)	1.5625 (4)	1.5625 (4)
Number of Blades		4	4	4	5	5	5	4	4
Auger Diameter	IN (CM)	20 (51)	20 (51)	23 (58)	23 (58)	23 (58)	23 (58)	18 (46)	20 (51)
Optional Second Auger Diameter	IN (CM)	—	—	14 (36)	14 (36)	14 (36)	14 (36)	—	—
Auger Drive Chain		60H	60H	80	80	80	80	60H	80
Automatic Chain Idler		Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
3-Part Chute		Optional	Optional	Optional	Optional	Optional	Optional	Standard	Standard
Motorized Hydraulic Chute Rotation		Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Replaceable and Reversible High Carbon Steel Cutting Edge		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Replaceable and Adjustable High Carbon Steel Skid Shoes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
3 Point Hitch Category		1 & 2	1 & 2	2	2 & 3	2 & 3	2 & 3	1	2
3 Point ASAE Quick Hitch Compatible		Yes	Yes	Yes, with optional kit	Yes, with optional kit	Yes, with optional kit	Yes, with optional kit	Yes	Yes
Driveline Standard / Optional		50/60	50/60	60/80	80/90	80/90	80/90	60	60
Parking Stand		Standard	Standard	Standard	Standard	Standard	Standard	—	—
Approx. Shipping Weight	LBS (KG)	1,036 (470)	1,074 (487)	1,531 (694) 1,670 (757.5)	2,045 (928) 2,120 (962)	2,083 (945) 2,158 (979)	2,196 (996)	1,745 (792)	2,025 (919)

DISCOVER OUR INVERTED MODELS

with standard 3-part chute and motorized hydraulic chute rotation.

