

PROFGRAIN EQUIPMENT















DEFEND GRAIN FROM WEATHER

Beat the harvest weather window

CHOOSE WHEN YOU SELL

Market your grain when you want

MOVE QUICKLY

Process 32,000 bushels/hour

SIMPLE, EFFECTIVE & TOUGH

Easy to setup & use, low maintenance

PAYS FOR ITSELF

Storage for only pennies per bushel

REDUCE LABOR

Harvest with less man power



PROFGRAIN EQUIPMENT





Get your grain out of the bag easily and efficiently.

PRO GRAIN EXTRACTOR (Mode E-1610)

- · 10,500 BU/hr Capacity
- Extract 9' and 10' Bags
- 16" Main Loading Auger, 10" Cross Auger
- Heavy duty gear box, all Renold chain, splined auger connection, Weasler PTO




Easy set-up

Low maintenance

Most chosen brand for rentals



Durable and reliable with 2 year limited warranty, longest warranty in the bagger business

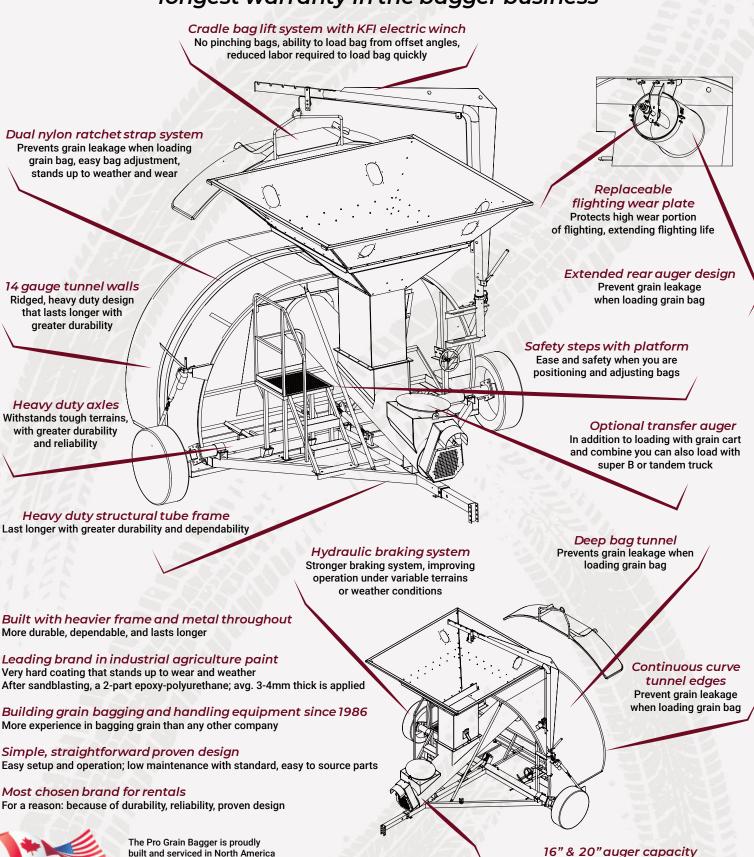

High capacity auger to keep up with carts and combines UltraFlyte™ flighting reduces wear and increases output

built and serviced in North America



Pro Grain Equipment Bagger Model Features

	B-1610	B-2010	В-2010Н	B-2010N	B-2012
Features					
Adjustable hitch length & height	e e	ger .	e e	65	6
Safety chains	ge-	ger	ge-	650	See.
Heavy structural main frame (3/16" - 1/4")	ger.	ger	ger.	450	ger.
14 gauge tunnel wall	850	ger	850	550	e e
Heavy duty 8,000# axle hubs	850	ger	850	ger.	30
Heavy duty 10,000# axle hubs		- 4	- 4		ger.
Hydraulic disc brakes	850	ge	8"	650	ger.
Precise brake pressure controlled by hand wheel	850	ge	850	ger.	ger.
Large 4" brake pressure gauge	850	g s	8"	ger.	ger.
Continuous curve tunnel design	85	g s	8"	ge-	g.
5' Deep Tunnel Depth	g g	g.	18.00	g.	· ·
4' Deep Tunnel Depth			ge-		
Bag pan, with bag tighteners	8	g.	ger.	g.c.	g.
Manual bag pan height operation			84	,	
Electric bag pan height operation	8	ونتي		ger.	g.
Adjustable screw thread bag pan mounts	6	ger.	ge-	ger.	g.
Double 2" nylon rachet strap system	e.	ger.	e.	ger.	g.
16" auger, 24,000 BU/hr capacity	6	v.)			
20" auger, 32,000 BU/hr capacity	- 0	ge-	ger.	ger.	g.
Direct Drive PTO	8	6	8"	520	
Replaceable auger wear plate	#	ger.	\$ Par	See.	F
Conveyor/auger inlet (see options)	#	ge-	= 1	See.	F
Bag boom with cradle lift system	ge-	ge	100	ge.	
Crane with cradle lift system	100	3.47	· ·	20	F
3000 lb electric winch (cradle lift)	850	gir.	8	ge-	
4500 lb electric winch (cradle lift)			V		e e
Electric trolley, with remote (cradle lift)					g.
Manual Trolley (cradle lift)			6	1	(A)
Transport lights	de.	g to	\$ to	Que.	· ·
Rearview transport window	de.	g to		650	F
Narrow road transport stance			Gr.	See.	
	41.1	100	1		1
Options					
	20 6	" A			41.3
T-1425 transfer auger, 11,500 bph	es.	Q ^c		g g	ger.
Electric bag pan height operation	43/15	100	e e		A. C.
Road transport kit	1/25		6	- 3	