

Compact Rod Bucket



Features



- Digging
- Rock Picking
- Asphalt Removal
- Small Tree Removal
- Brush Removal
- Demolition Clean-Up

**For Mini Skid Steer Loaders &
Compact Tractors up to 40 Horse Power**





Compact Rod Bucket

Specifications

For Mini Skid Steer Loaders & Tractors up to 40 Horse Power

Model	CRB48	CRB54	CRB60	CRB66	CRB72
Overall Width	48-1/2"	54-1/2"	60-1/2"	66-1/2"	72-1/2"
Depth of Bucket	30"	30"	30"	30"	30"
Height of Bucket Back	23"	23"	23"	23"	23"
Side Plate Thickness	3/8"	3/8"	3/8"	3/8"	3/8"
Cutting Edge	3/4" x 4"	3/4" x 4"	3/4" x 4"	3/4" x 4"	3/4" x 4"
Rod Diameter	3/4"	3/4"	3/4"	3/4"	3/4"
Rod Spacing	3"	3"	3"	3"	3"
Cast Shanks	6	7	8	9	10
With Replacable Tips					
Approx. Weight					

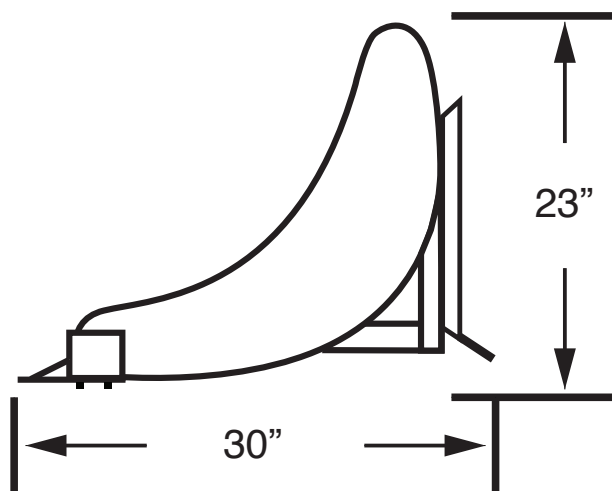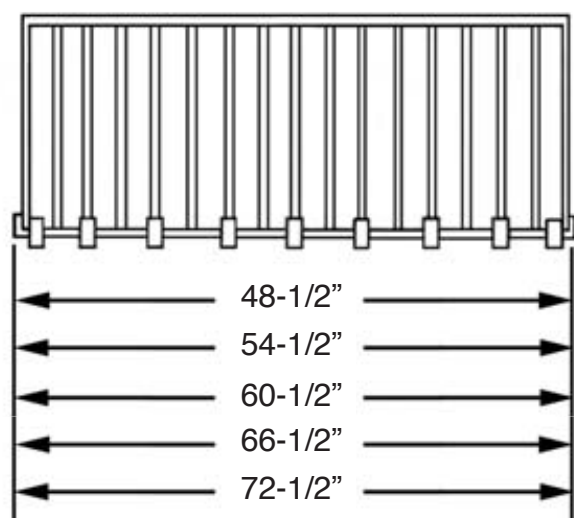

- Designed to be used on Compact Skid Steer Loaders & Compact Tractors up to 40 Horse Power
- Specifications and designs are subject to change without notice.

Your TMW Dealer



Attachments
320-453-3525

522 Meeker Ave. E. • Eden Valley, MN 55329