

Tiller



Offset to Extend Past Tires



Makes easy work of hard packed fill material and large clumps throughout any work project.

The Tiller is the ideal attachment when landscaping new construction sites or working soil in any conditions!

- Perfect for Your Landscaping Projects
- Double Edge Replacable Tine
- Single Skid Shoe Protects Motor & Controls Depth
- Available in Three Widths

Thielen Machine & Welding
TMW

Attachments
320-453-3525



Skid Loader Attachments

Tiller

Specifications


Model	52"	68"	76"
Overall Tiller Width	65"	79"	87"
Working Width	52"	68"	76"
Tiller Height	21"	21"	21"
Attachment Depth	27"	27"	27"
Tines	28	36	40
Working Depth	6"Maximum	6"Maximum	6"Maximum
Tine Rotation	Bi-Rotational	Bi-Rotational	Bi-Rotational
Drive	Direct Drive	Direct Drive	Direct Drive
Hyd. Flow Minimum / Maximum	18 / 35 GPM	18 / 35 GPM	18 / 35 GPM
Pressure Maximum	3500 Psi	3500 Psi	3500 Psi
Travel Direction	Forward/Reverse	Forward/Reverse	Forward/Reverse
Approx Weight of Attachment	450 lb	540 lb	585 lb

Tiller Dimensions

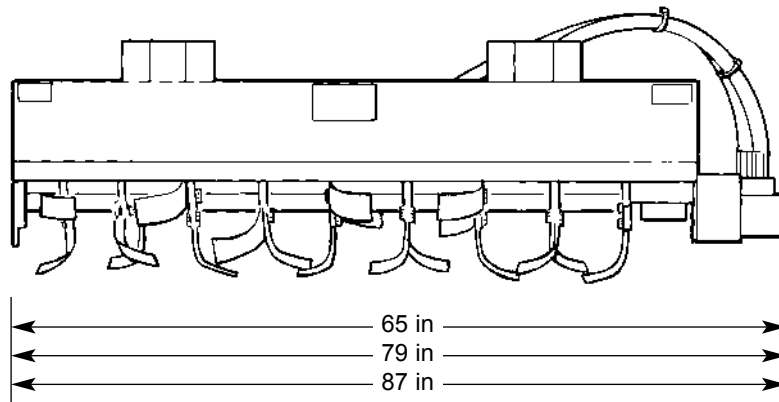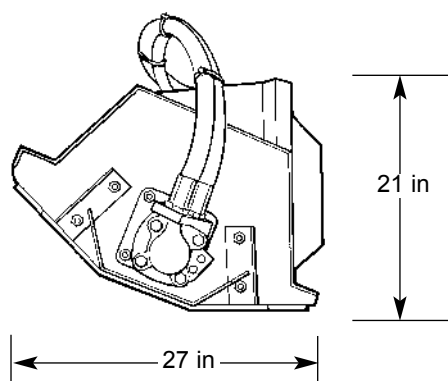

- Designed to be used on skid steer loaders with 1300 lb or more lifting capacity.
- Specifications and designs are subject to change without notice.

Your TMW Dealer



522 Meeker Ave. E. • Eden Valley, MN 55329